

# LP182\*182-M-78-NB

## N-Type TOPCon Dual Glass

Rated Power 610-625W



**N-Type MBB Cell**  
New circuit design N-type cells, can increase the output power of 10W~20W



**Bifacial with dual glass**  
Module adopts 182\*182mm half cells, bifacial module provide an additional 5%~25% output.



**Harsh Environmental Adaptability**  
Strict salt spray and ammonia corrosion test by TUV Nord.




**Low Light Features**  
Higher performance under low light environment.



**PID Protection**  
Ensure the attenuation probability caused by PID phenomenon is minimized.



**Load Capacity**  
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

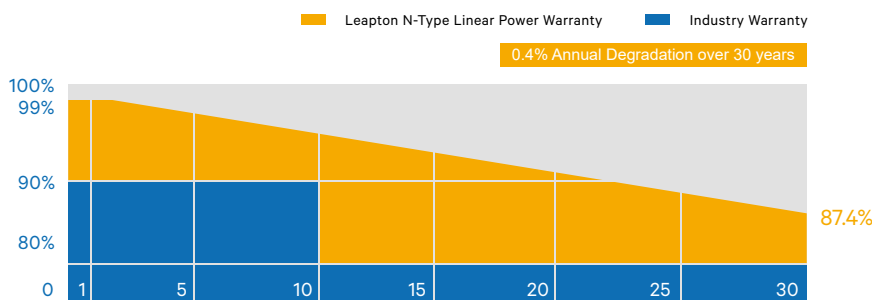

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

+81-78-382-3182

www.leaptonenergy.jp

Manufacturer : Leapton Solar (Changshu) Co., Ltd.


No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

## MECHANICAL DIAGRAMS

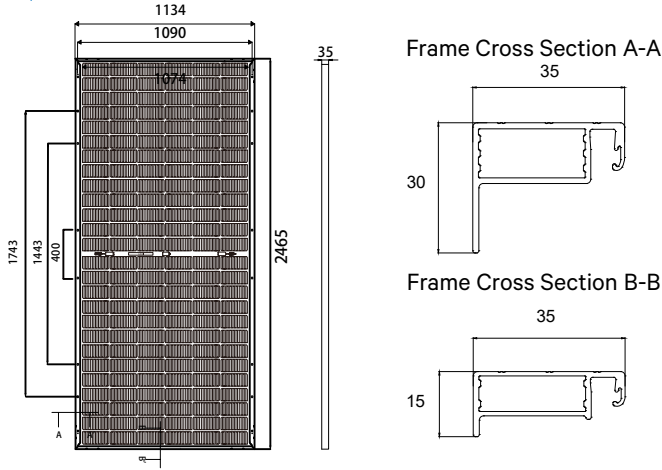

## SPECIFICATIONS

Weight	34.5kg
Dimensions	2465mm*1134mm*35mm
Cell Dimensions	182*182mm
Cell Amount	78*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm <sup>2</sup> , N 1500mm/P 1500mm for Horizontal installation 4mm <sup>2</sup> , N 300mm/P 300mm for Vertical installation
Connector	MC4 compatible
Application Level	Class A
Bifaciality	80±5%

## ELECTRICAL PARAMETERS AT STC

Power	610W	615W	620W	625W
Open Circuit Voltage	55.33V	55.48V	55.63V	55.78V
Short Circuit Current	14.09A	14.16A	14.23A	14.30A
Maximum Power Voltage	45.66V	45.76V	45.86V	45.96V
Maximum Power Current	13.36A	13.44A	13.52A	13.60A
Module Efficiency	21.82%	22.00%	22.18%	22.36%

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL PARAMETERS AT NMOT

Power	459W	463W	467W	470W
Open Circuit Voltage	52.56V	52.70V	52.84V	52.98V
Short Circuit Current	11.37A	11.43A	11.48A	11.54A
Maximum Power Voltage	42.38V	42.49V	42.61V	42.72V
Maximum Power Current	10.83A	10.89A	10.95A	11.01A
Module Efficiency	16.42%	16.56%	16.71%	16.81%

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## ELECTRICAL PARAMETERS ( AT 10% BIFACIAL POWER OUTPUT )

Output Power	671W	677W	682W	688W
Open Circuit Voltage	55.34V	55.49V	55.64V	55.79V
Short Circuit Current	15.44A	15.52A	15.61A	15.69A
Maximum Power Voltage	45.68V	45.78V	45.88V	45.98V
Maximum Power Current	14.69A	14.78A	14.86A	14.95A

## TEMPERATURE CHARACTERISTICS


NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

## PACKING CONFIGURATION


Modules/Pallet	31 Pieces	Modules/40'Container	558 Pieces
Packing Description	17 Pallets, Total=(31+31)x9=558 Pieces		

## CHARACTERISTICS

LP182\*182-M-78-NB-620W



LP182\*182-M-78-NB-620W



## MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A



Headquarter : Lepton Energy Co., Ltd.

📍 Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

☎ +81-78-382-3182

🌐 www.leptonenergy.jp

Manufacturer : Lepton Solar (Changshu) Co., Ltd.

📍 No.9, Sunshine Avenue, Changshu City, Jiangsu, China

☎ +86-512-88800068

✉ info@leptonenergy.com

🌐 www.leptonpv.com